

Part Numbers

Fixture

4371-Color Ribbon 24V


Specifications

IP Rating: IP 67

LED Quantity: 300

Red: 300
Green: 300
Blue: 300

LED Type: SMD-Tri Colored
Voltage: 24V
Avg rated Life: 30,000hrs
Operating temperature: -40°C to 80°C
Fastening System: Mounting Clips (included)
Led Spacing: .65" / 16.6mm
Cuttable Every: 3.92" / 100mm

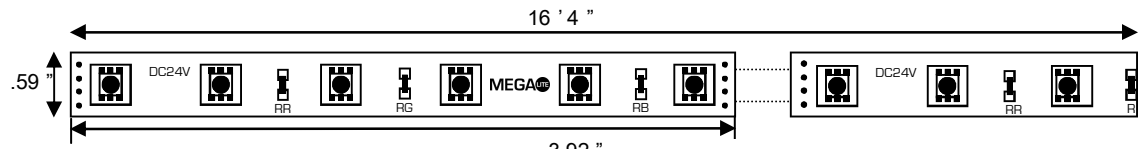

Fixture	Antistatic Bag Packaging
Size: 16'4" / 5 Meters L .59" / 14mm W	Size: 10.5" L 10" W
Weight: .75 lbs	Weight: .85 lbs

Accessories

4356-Color Ribbon DMX Control

The Color Ribbon DMX Controller can directly control and power (w/ 4363) a Color Ribbon series fixtures. The unit will output 3 channels of constant current PWM driving signal. Via DMX console you can control 3 channels of 256 levels. The unit also has built in pre stored effects that are accessible via the dip switches.

Protocol: DMX 512
Color Mixing : RGB color mixing when used with a DMX 512 console
DMX Channels: 3 Channels
Input Voltage: DC5V-DC24V
Output Current: 90W(5V) 220W (12V) 450W(24V)
Control Options: Activate 9 pre stored effect and control speed and rate
Power Quantity: 1 Color Ribbon w/power supply (4363)
Fastening System: Wall mountable plate
Dimensions: 4.92" L x 2.04" W x 1.57" H



4357-Color Ribbon Repeater

The Color Ribbon Repeater is specially designed to work with our Color Ribbon series fixtures. Its purpose is to expand power (W/4363) output allowing you to add more fixtures to the same control chain. In theory Power extender can be added unlimitedly to add more Color Ribbons Fixtures.

Input Voltage : DC5V-24V
Output Current: 90W(5V) 220W (12V) 450W(24V)
Driving LED Max: 1 Color Ribbon
Fastening System: Wall mountable plate
Dimensions: 4.75" L x 1.56" W x 1.55" H



4370 Color Ribbon 24V Power Supply

Color Ribbon Power Supply are used to provide power to the Color Ribbon DMX Controller (4356) and the Color Ribbon Repeater (4357). Wall mount included.

Input Voltage: 100-240VAC50/60HZ
Output Voltage: 24V 60W max
Listings: UL Listed

