
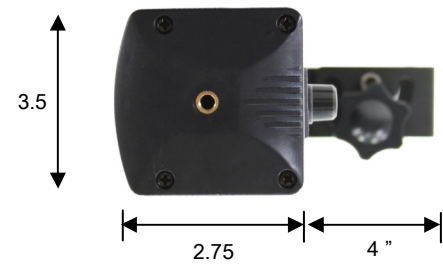


Fixture

4054- N-E Color Pro Strip

Mechanical Specifications

- DMX Connectors:** 3-pin XLR connectors
- Power Connection:** In/Out
- Thermal:** Maximum ambient temperature 40° C
Maximum surface temperature 60° C
- Fastening System:** Center Mounting Yoke (optional end mounts)
- Display:** Digital
- Refresh Rate:** 400Hz (flicker free)

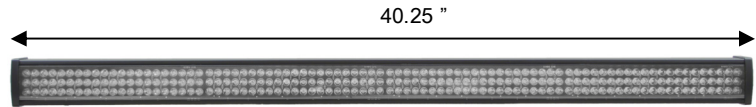

Fixture	Packaged for Shipping
Size: 40.25"L x 6.75"W x 3.5"H	Size: 41"L x 4.75"W x 7.25"H
Weight: 10 lbs	Weight: 12 lbs

Electrical Specifications

LED Quantity: 264

Red: 96
Green: 72
Blue: 96

LED Diameter: 10 mm

Segments: 8

LED Lifetime: 60,000 to 100,000 hours


LED Angle: 35° (± 5°)

Power Consumption: 100 - 240V 50/60 Hz

Ballast: Electronic

Watts: 27
Amps: .36

R(108)	281	21	8.8	4	2.3	LUX
G(72)	323	35	14	6.3	3.1	LUX
B(72)	541	58	20	10	5	LUX
RGB(252)	1115	110	41	20	10	LUX

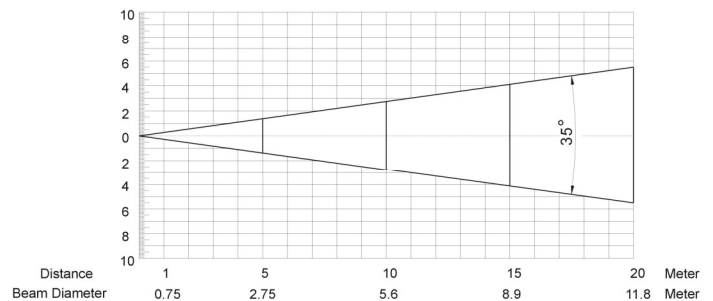

Control & Programming

Protocol: DMX 512

DMX Channels:	Mode P	12 DMX Channels	R,G,B,R,G,B,R,G,B,R,G,B
Mode A	16 DMX Channels	R,G,B, Dim/Str, R,G,B, Dim/Str, R,G,B, Dim/Str, R,G,B, Dim/Str	
Mode F	6 DMX Channels	Dimmer, R,G,B Strobe, Macros	
Mode H	24 DMX Channels	R,G,B,R,G,B,R,G,B,R,G,B,R,G,B,R,G,B,R,G,B,R,G,B,R,G,B,R,G,B	
Mode L	40 DMX Channels	R,G,B, Dim,Str, R,G,B, Dim,Str, R,G,B, Dim,Str, R,G,B, Dim,Str	

Control options: Audio-trigger

Operating Mode: Master/Slave, Stand alone

